

Installation taxi shield




#1

Remove the film protective

#2

Put in place

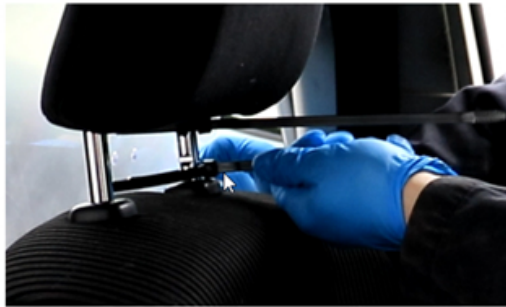

#3

Attach the protector to the headrests and cut what sticks out

#4

Cut the surplus of the Zip Tie



* AMP Digital Inc. offers no guarantee whatsoever and release itself from any liability, direct or indirect which might be related to the use of the protector.